

# Eltek TU1064 - GenII OD18W wind speed/direction transmitter


OD18W



GD18Wcf

gland

To fit the sensor lead:

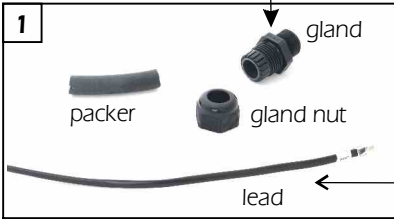

Use with Davis 6410 anemometer. For pole mounting (suitable pole is a 25mm lightweight aluminium gauge).

OD18W has 2 channels.

Channel A - Wind direction. Range: 0.0 to 360.0°

Channel B - Wind speed. Range: 0.0 to 60.0 m/s

Battery: Uses 4 x AA alkaline batteries.

Endurance: Up to 2 years at 1 minute Tx interval

2 to 3 years at 5 minute Tx interval



12m lead terminated with RJ11 connector  
Davis 6410 fitting instructions in box.

OD18W pole mounting:



Ensure screws are tightened to make effective weather seal.

